




Facts


Coating	Slot die / Double-sided-slot die / Foulard / 2 Roller system
✓ Working width	300 mm
✓ Roller width	350 mm
✓ Operating speed	0.1 – 5 m/min
✓ Tensile strength	25 – 250 N
✓ Dryer	Hot air
✓ Dryer length	2x 1 m (1x Horizontal, 1x Vertical)
✓ Coating directions	Horizontal / Vertical
✓ Dryer temperature	235 °C
✓ Unwinder	Motor brake
✓ Winder	Motor brake
✓ Maximum roll diameter	400 mm
✓ Clamping axis	76 mm / 3"
✓ Special equipment	Foulard incl. Squeezer / Double-sided coating
✓ Layout	IP54 / Atex
✓ Dimensions (LxWxH)	5,100 mm x 1,350 mm x 3,000 mm

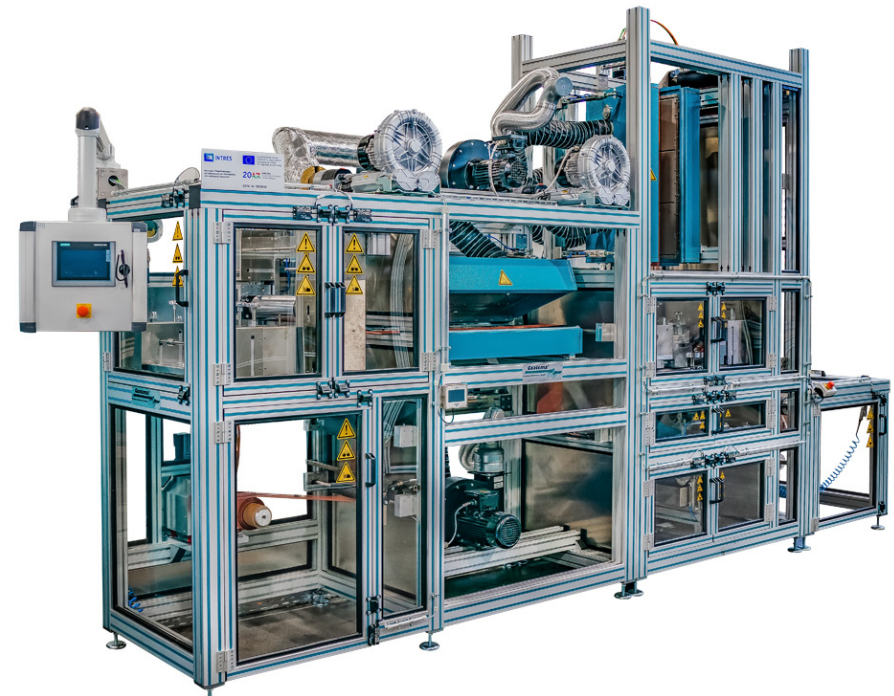

Knife system



Slot die system



Dipping system (Foulard)

